
dyson airblade V

TECHNICAL SPECIFICATION





REAR ELEVATION SIDE ELEVATION

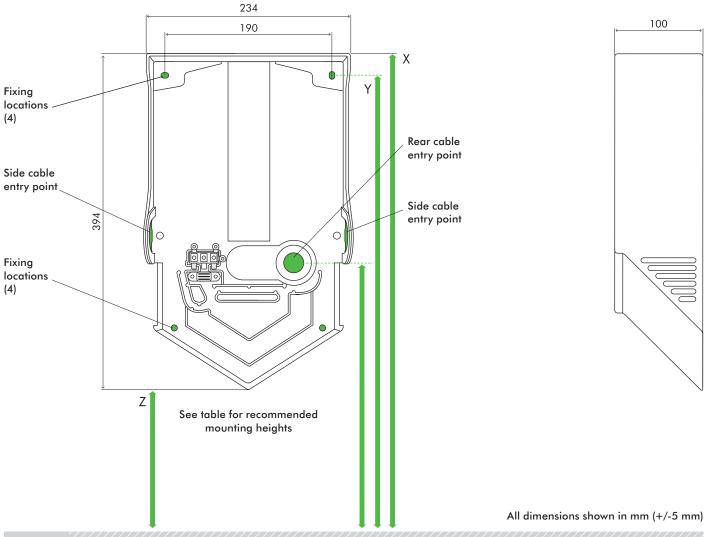

Minimum clearance

ш		

Recommended installation heights from floor							
Male	X 1324 mm	Υ	1300 mm	Z	930 mm		
Female	X 1289 mm	Υ	1265 mm	Z	895 mm		
Child or disabled	X 1074 mm	Υ	1050 mm	Z	680 mm		
Child 5-8	X 952 mm	Υ	928 mm	Z	558 mm		
Child 8-11	X 1052 mm	Υ	1028 mm	Z	658 mm		
Child 11-14	X 1132 mm	Υ	1108 mm	Z	738 mm		
Machine dimensions							
Height 394 mm Width 234 mm [Depth 100 mm						

220mm clearance either side and 30mm above machine. Cable entry point from floor					
Female	1054 mm				
Child or disabled	839 mm				
Child 5-8	717 mm				
Child 8-11	817 mm				
Child 11-14	897 mm				

For further information please contact Dyson:

Visit: www.dyson.ae Call: +971 4 **350 7877**

dyson airblade V



Electrical

Input voltage/Frequency: 200-240 V 50&60 Hz Standby power consumption: Less then 0.5 W

Motor specification: 1,000 W digital brushless motor

Heater type: None

Construction

Fascia: Polycarbonate

Antibacterial coating type:

HU02 (Sprayed Nickel) contains antibacterial additive in paint.

HU02 (White) contains antibacterial moulded additive.

Can help prevent the growth of bacteria.

Back plate mounting bracket: ABS/PBT Plastic

Exterior screw type: Anti-tamper 4 mm Pin-Hex

Water ingress protection to IP24

Filter

HEPA filter (Glass fibre and fleece prelayer)

99.9% of particles captured

Operation

Touch free capacitive sensor activation

Hand dry time measurement: 12 seconds (Measurement based on NSF Protocol P.335)

Sound power level: 79 dB(A)

Sound pressure level @ 2 m: 63 dB(A)¹
Operation lock-out period: 30 seconds
Airspeed at aperture: 690 km/h / 430 mph
Maximum altitude: 2,000 metres / 6,561 ft.

Logistics

Single unit order code:

Malaysia: Sprayed Nickel 307735-01, White 307734-01 South Korea: Sprayed Nickel 307596-01, White 307595-01 Rest of world: Sprayed Nickel 307170-01, White 307169-01

Unit barcode:

Malaysia: Sprayed Nickel 5025155025871, White 5025155025864 South Korea: Sprayed Nickel 5025155025833, White 5025155025826 Rest of world: Sprayed Nickel 5025155025796, White 5025155025710

Net weight: 2.9 kg / 6.17 lbs

Packaged weight: 4.0 kg / 8.81 lbs

Packaged dimensions:

 $(H)145 \times (W)455 \times (D)274 \text{ mm} / (H)5^3/4" \times (W)17^7/8" \times (D)10^3/4"$

Standard guarantee

5 year guarantee

¹Sound pressure measured at 2 m distance, in a semi-anechoic chamber.



Product range

Sprayed Nickel













The Carbon label is a trademark of the Carbon Trust.

The NSF logo is the registered trademark of NSF International.

Quiet Mark is a registered trademark of the Noise Abatement Society.

For further information please contact Dyson:

Visit: www.dyson.ae Call: +971 4 **350 7877**